



Pelagia Research Library

European Journal of Experimental Biology, 2013, 3(3):647-651



The influence of wastewater Sirjan golgozar industrial on chemical properties of cultivated soils in several species of trees pasture

Ehsan Kashani* and Alireza Moradi

Department of Natural Resources, College of Agriculture and Natural Resources, Baft Branch, Islamic Azad University, Baft, Iran

ABSTRACT

The aim of this study were to investigate the influence of wastewater Sirjan golgozar industrial on chemical properties of cultivated soils in several species of trees pasture. This study was performed at the Sirjan city which is located in southwest of kerman province (1766 meters above the sea level, 29° 27' N latitude and 55° 40' E longitude, and 162 mm annual rainfall). This experiment was conducted a completely randomized design block testing in split factorial with 5 treatment and 3 replicated. In this study, we used different ratios of water and wastewater including control (normal water), 25% wastewater + 75% water, 50% water + 50% wastewater, 75% wastewater + 25% water and wastewater of sirjan golgozar industrial. These treatment were used for irrigation of several species of pasture trees (*Pestasia atlantica*, *Amygdalus scoparia*, *Amygdalus elaeagnifolia* and *Acer monspessulanum*). Soil salinity, sodium adsorption ratio (SAR) and soil organic matter wer evaluated in this study. Data were analyzed by ANOVA using general linear model procedure of SPSS software. Significance between means was tested using Duncan Multiple Range Test. Results showed that the difference between mean treatments in the study was significant ($P < 0.05$). Comparison of chemical properties in soil before and after treatment showed that the using of wastewater sirjan golgozar industrial were increased chemical properties in soils. With the increasing of waste, the amount of organic materials have also increased, the treatment with wastewater have the largest amount of organic matter. In generally, we can conclude that the using of wastewater treatments due to decrease salting and increase organic matter than to control treatments can improve the soil for the plants.

Key words: Wastewater, Cultivated soil, Chemical properties

INTRODUCTION

This is mainly a necessity in regions which are characterized by severe mismatches between water supply and demand, often associated to generally low water resources availability and asymmetries of availability and demand in a temporal and regional basis and a peculiar relationship among water and environment raise specific problems [9]. Irrigation with wastewater also appears to give some very interesting effects on the soil and on the crops. As a result, the use of reclaimed wastewater for irrigation has been progressively adopted by virtually all Mediterranean countries [10]. It is therefore necessary to take precautions before reusing wastewater. As a result, although the irrigation of crops or landscapes with sewage effluents is in itself an effective wastewater treatment method, a more effective treatment is necessary for some pollutants and an adequate water storage and distribution system must be

provided before sewage is used for agricultural or landscape irrigation [2]. The use of treated sewage effluents (TSE) for agricultural irrigation is an old and popular practice in agriculture [4]. Alternative water resources are therefore needed to satisfy further increases in demand. Because irrigation is by far the largest water use in the world and the quality requirements are usually the easiest to achieve among the various types of wastewater reuse, it is by far the largest reuse application in terms of volume. This rapid development of irrigation translates into a sharply increasing water demand and the most accessible water resources, such as rivers and shallow aquifers are now almost entirely committed. However, wastewater is often associated with environmental and health risks. As a consequence, its acceptability to replace other water resources for irrigation is highly dependent on whether the health risks and environmental impacts entailed are acceptable. Therefore, the aim of this study were to evaluating the effect of wastewater Sirjan golgozar industrial on chemical properties of cultivated soils in several species of trees pasture.

MATERIALS AND METHODS

This study was performed at the Sirjan city which is located in southwest of kerman province (1766 meters above the sea level, 29° 27 N latitude and 55° 40 E longitude, and 162 mm annual rainfall). This experiment was conducted a completely randomized design block testing in split factorial with 5 treatment and 3 replicated. In this study, we used different ratios of water and wastewater including control (normal water), 25% wastewater + 75% water, 50% water + 50% wastewater, 75% wastewater + 25% water and wastewater of sirjan golgozar industrial. These treatment were used for irrigation of several species of pasture trees (*Pestasia atlantica*, *Amygdalus scoparia*, *Amygdalus elaeagnifolia* and *Acer monspessulanum*). After leveling, land tested and divided into 15 plots, each main plot was divided into four sub-plots. Annuals seedlings were randomized cultivation in plots at February 2009. The complete watering plants were doing for established until March 15. From 15 March 2009 to 15 July 2010 the irrigation was applied with different ratios of water and wastewater treatments.

Chemical analysis of soil samples

Soil chemical properties were measured in this study include: Soil salinity, sodium adsorption ratio (SAR) and soil organic matter.

Statistical analysis

Data were analyzed by ANOVA using general linear model procedure of SPSS software. Significance between means was tested using Duncan Multiple Range Test. A probability value of $P \leq 0.05$ indicated that the difference was statistically significant. Least square treatment means were compared if a significant F statistic (5% level of P) was detected by analysis of variance.

RESULTS AND DISCUSSION

The means comparison between different treatments on salinity soil are presented in Figure 1. This figure indicate that maximum soil salinity were observed in 2 treatment. Results also showed that the soil salinity between treatment were significant ($P < 0.05$). With the increasing of waste, the amount of soil salinity was decreased.

The means comparison between different treatments on sodium adsorption ratio (SAR) are presented in Figure 2. This figure indicate that maximum sodium adsorption ratio were observed in 1 treatment and minimum concentration were observed in 5 treatment. Results also showed that the sodium adsorption ratio between treatment were statistically significant ($P < 0.05$). In addition, with the increasing of waste, the sodium adsorption ratio was decreased.

The means comparison between different treatments on soil organic matter are presented in Figure 3. This figure indicate that maximum soil organic matter were observed in 5 treatment and minimum concentration were observed in 1 treatment. Results also showed that the soil organic matter between treatment were statistically significant ($P < 0.05$).

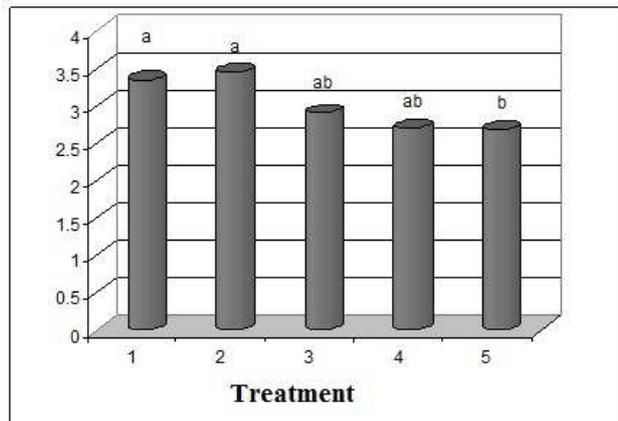


Figure 1. The effect of different levels wastewater on soil salinity

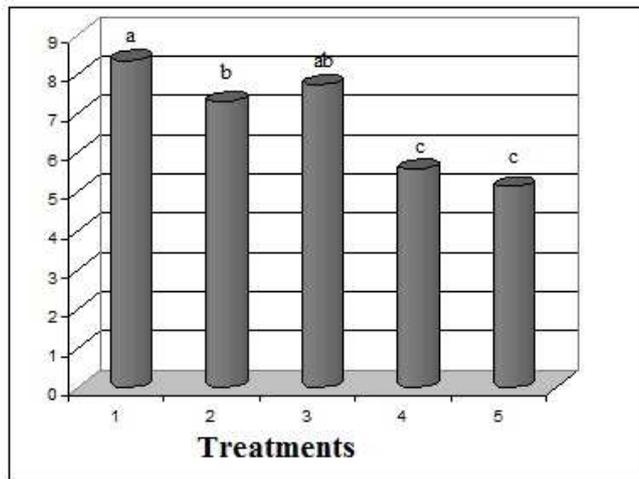


Figure 2. The effect of different levels wastewater on sodium adsorption ratio

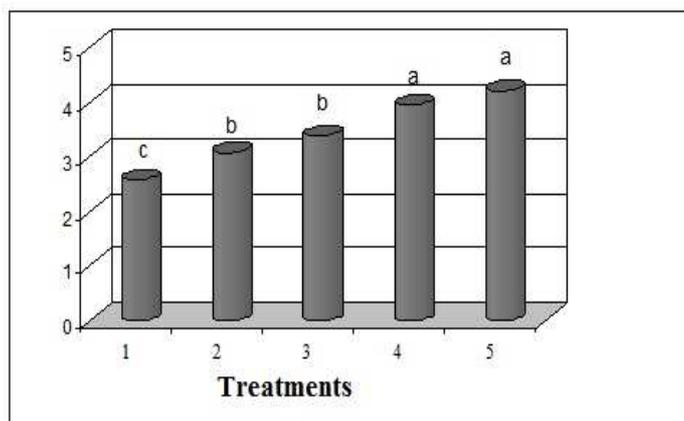


Figure 3. The effect of different levels wastewater on soil organic matter

In the Mediterranean basin, wastewater has been used as a source of irrigation water for centuries. In addition to providing a low cost water source, the use of treated wastewater for irrigation in agriculture combines three advantages. First, using the fertilizing properties of the water (fertirrigation) eliminates part of the demand for

synthetic fertilizers and contributes to decrease the level of nutrients in rivers. Second, the practice increases the available agricultural water resources and third, it may eliminate the need for expensive tertiary treatment. Irrigation with wastewater also appears to give some very interesting results on the soil and on the crops. As a result, the use of reclaimed wastewater for irrigation has been progressively adopted by virtually all Mediterranean countries [10]. Because irrigation is by far the largest water use in the world and the quality requirements are usually the easiest to achieve among the various types of wastewater reuse, it is by far the largest reuse application in terms of volume. The soil-plant system, if adequately managed, encourages retention of effluent components mainly due to the incorporation of elements in the dry matter (DM) of plants [3], leading to decreasing element concentrations in ground and surface waters [5]. Harvest and removal of plant material withdraw the accumulated elements, which further contribute to prevent leaching of elements, mainly nitrogen (N) and phosphorus (P) and enrichments in the subsoil solution and the groundwater concentrations [11, 8]. Although irrigation with TSE may mitigate the damage and utilization of natural water resources and enables the diversion of nutrients from waterbodies, it may result in risks that need to be considered in more detail, particularly in the tropics [6]. Historically the question of wastewater treatment has largely been approached from the standpoint of pollution control. However, there is now growing interest in treatment for water conservation and re-use (for crop or grass turf irrigation) to take advantage of the nutrients contained in sewage water [12]. Such re-use offers numerous advantages: reduced demands on ground and surface water supplies, lowering capital and operating costs for wastewater treatment compared to conventional approaches. Biological uptake by plants and retention by soil reduces potential contamination of the water table [1]. In addition, the economic products from wood harvested from the trees and creation of areas of treed wetlands for wildlife and human recreation are benefits to offset costs of implementing the system. Focussing on agronomical-environmental aspects the objectives of this text were to present an overview of the effects of TSE irrigation on yield production and plant nutrition (annual crops, orchards, forests and forages) as well as on chemical, physical and microbiological soil characteristics. Conventional wastewater treatment plants employ a sequence of physical settling and separation, biological (microbial) digestion and chemical treatment (generally with a halide, most frequently a chlorine compound) before release into the environment. Microbial activity is insufficient to achieve complete uptake of nitrogen and phosphorus because of the high concentrations of these elements in the organic material contained in sewage waters. There are generally accepted standards of water quality which the proposed system must fulfill to be an acceptable option for secondary or tertiary treatment. In this study, "wastewater" is synonymous with sewage, or the combined water stream from households and commercial/industrial wastewater flows. Wastewater is thus a mixture of metabolic excretions (feces, urine) and gray water (laundry, kitchen). This has resulted in widespread eutrophication of rivers, lakes and marine environments, especially shallow coastal waters causing loss of valuable aquatic species and other environmental degradation [7]. There is thus incomplete reduction of nutrients contained in the sewage waters in conventional wastewater treatment plants which rely exclusively on microbes for their biological activity. Thus, even discounting the widespread, especially in developing countries, discharge of completely untreated wastewater into natural water bodies, the effluent from modern treatment plants typically releases waters excessively enriched with nitrogen and phosphorus. It will facilitate later discussions to review the terminology of wastewater treatment so that the frequently used terms, such as primary, secondary and tertiary treatments, are clearly understood when we consider various options for use of fast-growing trees as a wastewater treatment technology.

CONCLUSION

It was concluded that the using of wastewater treatments due to decrease salting and increase organic matter than to control treatments can improve the soil for the plants.

REFERENCES

- [1] Al-Mutaz, I.S., **1989**. *Desalination*, 73: 27-36.
- [2] Asano T., Smith R.G. and Tchobanoglous G. **1985**. In *Irrigation with Reclaimed Municipal Wastewater: A Guideline Manual*, eds G. S. Pettygrove and T. Asano. Lewis Publishers, Chelsea, MI 48118.
- [3] Bouwer, H.; Chaney, R.L., **1974**. *Advances in Agronomy*, v.26, p.133-176, 1974.
- [4] Feigin, A.; Ravina, I.; Shalhevet, J. **1991**. *Irrigation with treated sewage effluent: management for environmental protection*. Berlin: Springer-Verlag, 224p.
- [5] Feigin, A.; Bielorai, H.; Dag, Y.; Kipnis, T., **1978**. Giskin, M. *Soil Science*, v.125, p.248-254, 1978.
- [6] Fonseca, A.F. **2005**. Tese (Doutorado) - Escola Superior de Agricultura Luiz de Queiroz, Universidade de São Paulo.

- [7] Hamer, G., T. Egli and N. Al-Awadhi, **1989**. *Desalination*, 72:31-65.
- [8] Hook, J.E. **1981**. *Soil Science Society of America*, p.241-255.
- [9] Kashani E, **2013**. *International journal of Advanced Biological and Biomedical Research*. 1, 3: 313-320.
- [10] Marecos do Monte M. H. F., Angelakis A. N. and Asano T. **1996**. *Water Sci. Technol.* 33(10-11), 303-316.
- [11] Quin, B.F.; Forsythe, L.J. **1978**. *New Zealand Journal of Agricultural Research*, v.21, p.427-434.
- [12] Smith, Robert G. and M. R. Walker, **1991**. *Research Journal of the Water Pollution Control Federation*, 63(4): 428-430.