Research Article

iMedPub Journals
www.imedpub.com

America Journal of Computer Science and Information Technology
ISSN 2349-3917

2026
Vol.14 No.1:01

Evaluating HOMER Software's Decision-Making Capabilities in Terms of Ecological Impact and Financial Benefits

Echarradi Othmane* **And Fahoume Mounir**

Department of Computer Engineering, Ibn-Tofail University, Kenitra, Morocco

***Corresponding author:** Sushmitha VL, Department of Computer Engineering, Ibn-Tofail University, Kenitra, Morocco; E-mail: Othmane.echarradi@uit.ac.ma

Received date: February 03, 2025, Manuscript No. IPACSIT-25-20289; **Editor assigned date:** February 06, 2025, PreQC No. IPACSIT-25-20289 (PQ); **Reviewed date:** February 21, 2025, QC No. IPACSIT-25-20289; **Revised date:** April 03, 2026, Manuscript No. IPACSIT-25-20289 (R); **Published date:** April 10, 2026, DOI: 10.36648/2349-3917.14.1.01

Citation: Othmane E, Mounir F (2026) Evaluating HOMER Software's Decision-Making Capabilities in Terms of Ecological Impact and Financial Benefits. Am J Compt Sci Inform Techno Vol:14 No:1

Abstract

The need to protect the environment against human-induced pollution is no longer to be demonstrated. Radical solutions are expected soon to mitigate the impact of climate change in the first step and then gradually improve the ecological situation in the second step. Several efforts on the part of governments and the scientific community are being deployed to better serve the planet. It is in this sense that this work is registered to bring a contribution to this field of study. What it is particularly intriguing about this work is its critical examination of a well-known software, aiming to underscore a significant finding that has been corroborated by multiple simulations even before this study. These simulations reveal that the so-called "best" proposals generated by the software are not as environmentally friendly as one might expect. While these solutions may be economically advantageous, they often fall short in terms of environmental sustainability. The primary aspiration for this work is that, through certain modifications to the algorithms, the platform can introduce a separate option. This option would cater to individuals who are more concerned with environmental respect, allowing them to take advantage of the benefits offered by the platform alongside those who prioritize profit. This work draws inspiration from a recently published paper titled "Ecological impact due to the implementation of a modeled and optimized hybrid system." In comparison to the previous work, this current study provides a wealth of additional details and aspires to make available to the general public a method that stands as a post-Homer study, while offering solutions tailored to those whose concerns lean more towards the well-being of our planet than financial gains.

Keywords: Hybrid system; Sizing optimization; Green energy sale; HOMER software; Greenhouse gas

Introduction

Solving the energy [1,2] dilemma which opposes, on the one hand, providing the need for energy to everyone, which has become vital in some areas [3], and on the other hand, reducing greenhouse gases to avoid an inevitable catastrophe, is becoming the focus of the most important scientific research nowadays [4]. One thing is sure, the resolution of this dilemma will not come with a snap of the fingers but with sacrifices especially of economic nature. For example, China will have to do without the biggest world reserve of coal to the profits of energies said green [5]. The change, as we well understand, requires a lot of effort and will go through many stages before a satisfactory result for the environment. This work, which is part of one of these transitional stages, come to contribute to the efforts already made by scientists around the world.

The main goal of this study is to make clear the ecological contribution of green solutions [6], here a hybrid system [7], to show the importance of such action for the planet earth [8]. However, not all hybrid solutions contribute in the same way. Indeed, if the ecological aspect is not taken into account, the results of the optimization, will not be necessarily the best for the environment, and this is exactly what will be demonstrated for the case study of this work, and more precisely during the manipulation of the HOMER software. The conducted study will also determine what is best for the climate in our project by defining the best possible combinations of energies that contribute to avoiding the most greenhouse gases.

Materials and Methods

In this section, the choice of the location of the project will be justified. This location was not chosen trivially, but because it has a large solar and wind field throughout the year.

Through this section, HOMER [9] will optimize the hybrid system. Other solutions for the optimization of hybrids systems can be used but HOMER has been chosen. This is justified by the fact that this software is very efficient and widely used by scientists.

Situational setting

We want to build a new factory of prefabricated building materials (bricks, pipes...). However, being a fervent supporter of ecology, the owner requires that his new factory is as environmentally friendly as possible. This plant is running 24

© Copyright iMedPub | This article is available from: https://www.imedpub.com/computer-science-and-information-technology/

hours a day, so only a hybrid solution can meet the man's requirements.

Geographic data: The factory in question is located in Diabat, in the region of Essaouira, Morocco as shown in Figure 1. The factory covers an area of 12 hectares. Five areas cover this surface, namely:

- Factory A: Brick manufacturing
- Factory B: Manufacture of reinforced concrete pipes
- Plant C: Manufacture of polyethylene pipes
- External area
- Administrative area



Figure 1: Mapping the Diabat area, Essaouira, Morocco.

Meteorological data: In this region, the summers are quite hot and arid while the winters are cool and clear on the whole. The climate is windy throughout the year. The following figures give an idea of the weather in Essaouira.

- **Profile of the temperature:** Figure 2 below shows the temperature profile for this region. The temperatures were taken for the period between 1/11/2021 and 1/11/2022, *i.e.*, one year. Note that these data are taken from the NASA website.

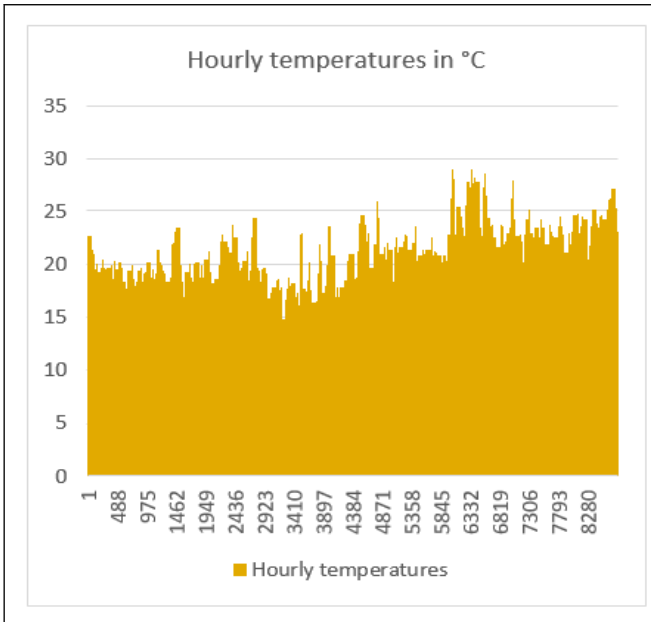


Figure 2: Hourly temperature profile for a full year.

- **Wind pattern:** Figure 3 below shows the hourly wind speed profile at 10 m above ground level for the study area. The period of record is from 01/11/2021 to 01/11/2022. In this case, NASA is the source of these samples.

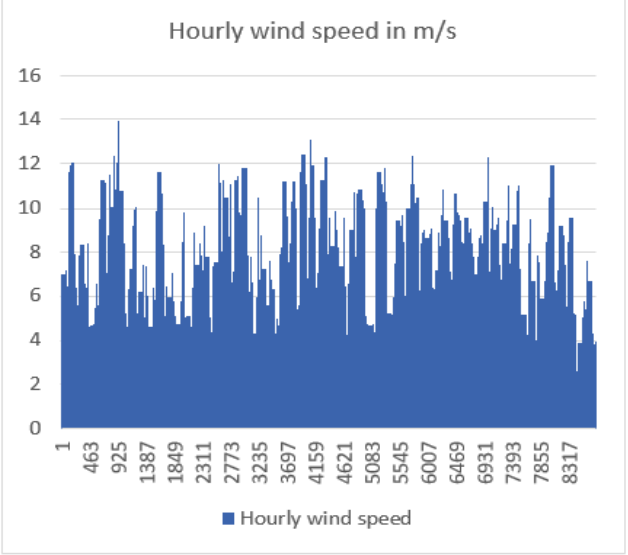


Figure 3: Hourly wind speed profile for a full year.

- **Solar irradiation profile:** Figure 4 below shows the hourly solar irradiation for the study area. The period of record is from 01/01/2021 to 01/01/2022. In this case also, the NASA is the source of these samples.

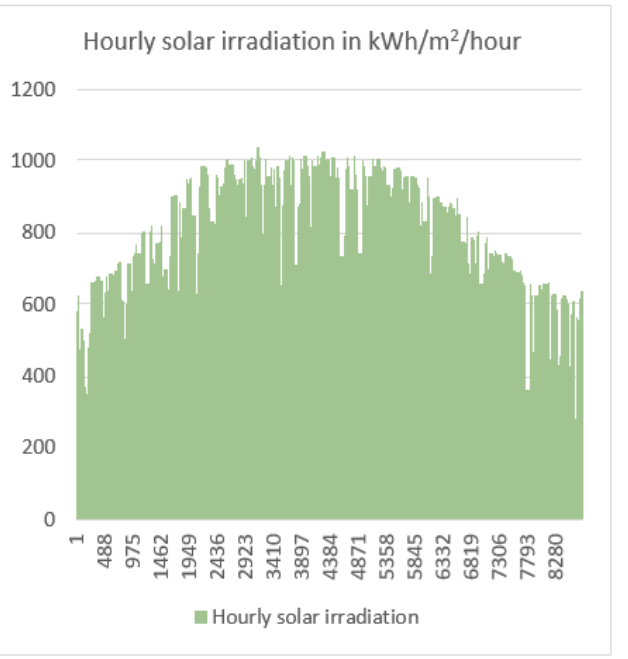


Figure 4: Hourly solar irradiation profile for a full year.

Consumption profile: The operating hours of the five areas differ, since plants A and B operate for 12 hours from 7 am to 7 pm, the plant C operates continuously, *i.e.*, 24 hours a day, the outdoor area operates from 6 pm to 6 am, while the administrative area has service hours from 8 am to 4 pm. These

data give the following consumption profile. This profile is illustrated in Figure 5.

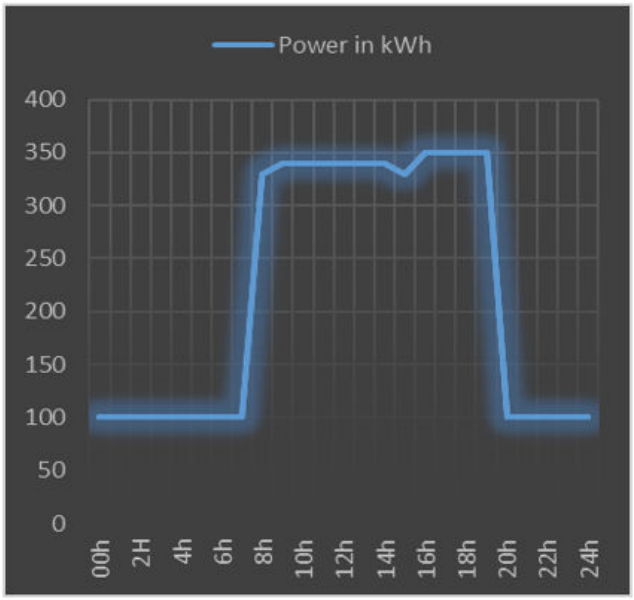


Figure 5: Electricity consumption profile.

Optimization of the hybrid system

In this part, the optimization of the hybrid system will take place. The components of this system have been carefully selected. The characteristics of these elements will be exposed in the following.

Technical characteristics of the elements of the system:

Wind turbine: For this component, the choice fell on the wind turbine XANT L-33 (330kW), the diameter of its rotor is 33 m, the wind turbine power curve is shown in Figure 6 below, and its life span is at least 20 years, while the price of this turbine is 750000 USD.

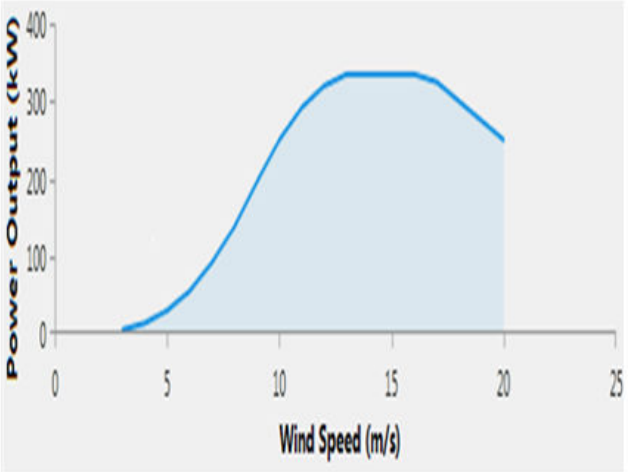


Figure 6: The wind turbine power curve.

Photovoltaic panels: The Italian brand PEIMAR was preferred for this element, the chosen model is the SG370M which is composed of 72 cells of monocrystalline type, its nominal output (P_{max}) is 380 W, the module efficiency is 19,07%, its life span is 30 years, its I-V characteristic for different radiations is shown in Figure 7. Note that it costs 640 USD for a kilowatt-hour.

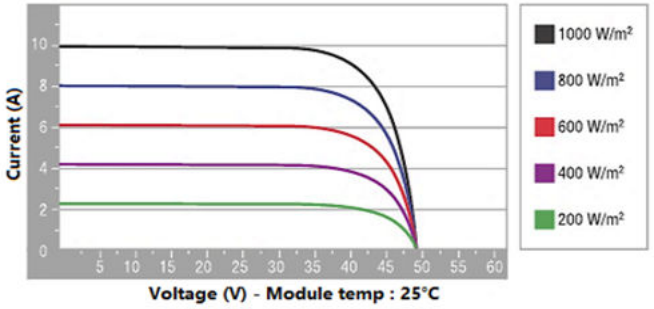


Figure 7: I-V characteristic of the photovoltaic generator for different radiations.

- **Storage:** Iron Edison LFP 2100Ah was chosen, it's a lithium ion battery, its nominal voltage is 48 V, its nominal capacity is 101 kWh, its life span is 10 years and it costs 71700 USD per unit.
- **Grid:** The public electricity distributor is here the O.N.E.E affiliated with the Moroccan state, the purchase of 1 kWh costs 0.12 USD while the sale of 1 kWh costs 0.08 USD (assumption for this study since the sale of electricity is still not allowed in Morocco).
- **Converter:** The chosen inverter is the Leonics GTP-518HET(P) 680 Kw, it's a PV-dedicated, three-phase, grid-connected, and it has an integrated MPPT, which is generally dictated by one of three well-known algorithms among them the perturbation and observation (P and O) whose algorithm, AC output 680 Kw, output 380 V_AC, lifetime assumed to be 10 years and it cost 600 USD/kW.

HOMER simulation:

The optimization, as we have already mentioned, will be executed by the software HOMER, as it is the best tool for hourly evaluation of hybrid and renewable electricity production systems in the world - without exception. Right after project simulation, we obtain as expected a multitude of proposals, more exactly 8 considered as the best as shown in Figure 8. The solutions are ranked from the best economic solution that we note P1 to the least good that we note P8.

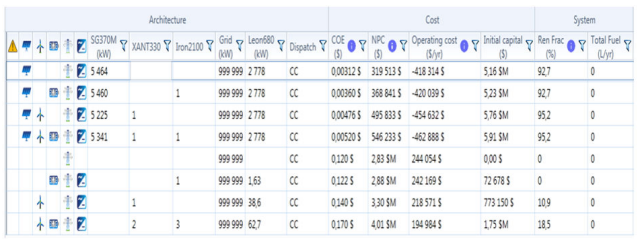


Figure 8: Optimal solutions proposed by HOMER from P1 to P8.

The Homer software is, de facto, highly proficient in its function, which is to propose solutions that highlight the optimal

© Copyright iMedPub

combinations of hybrid systems based on the user's choice of system types. This choice typically depends on the geological and climatic conditions of the installation sites for the hybrid system. However, from an ecological and responsible standpoint, does this software guarantee its users that these proposals are indeed the best? The answer is "No." Throughout this next paragraph, we have demonstrated this, thereby providing a post-Homer analysis that allows those who prioritize the ecological future of the planet over potential economic gains to find the solution that best suits them.

Amount of CO_2 avoided:

The goal of this part is to be able to extract the solution that allows us to avoid the greatest amount of CO_2. Table 1, which has as sources the AMEDE and the GIEG, provides important information about the CO_2 emission of each type of energy source. These energies can be renewable as well as fossil fuels.

Table 1: Quantity of CO_2 emissions for each energy source.

Sources of energy	CO_2 emissions per kWh
Onshore wind turbine	12.7 g
Offshore wind turbine	14.8 g
Fossil gas	490 g
Coal	820 g
Photovoltaic solar	43.9 g
Oil	510 g
Hydraulic	43 g
Concentrating solar	22 g

The first step to determining the amount of CO_2 avoided is to determine the carbon footprint of the CO_2 avoided by each of the proposals and to extract by then the highest value. Table 2 below gives the contribution of each energy source for one kWh in Morocco.

Table 2: Contribution of each energy source for one kWh in Morocco.

Sources of energy	Contribution to the production	Emission contribution in one kWh produced
Coal	67.60%	554.32
Oil	1.50%	7.65
Onshore wind turbine	11.60%	1.47
Fossil gas	11.80%	57.82
Hydraulic	3.20%	1.37
Concentrating solar	4.30%	0.946

After calculation, the carbon footprint of a Kilowatt-hour of electricity produced in Morocco is: 623.58 g/kWh. Table 3 below summarizes the amount of energy produced in detail from each of the 8 proposals.

Based on these figures, it will be possible to determine the amount of CO_2 avoided by each of the proposals and to extract by then the highest value.

Table 3: Amount of energy produced per year in detail from each of the 8 proposals.

	Solar energy production in kWh	Wind power production in kWh	Grid purchases in kWh
P1	9 977 598	0	644 029
P2	9 978 072	0	644 026
P3	9 656 199	731 560	436 493
P4	9 870 781	731 560	435 518
P5	0	0	2 033 780
P6	0	0	2 033 780
P7	0	731 560	1 811 995
P8	0	1 463 121	1 658 227

By calculation, it turns out that P4 is the proposal that avoids the most CO_2 with more than 6440 tons/year.

Results and Discussion

As the first result of this study, we notice that HOMER, although it is a software program oriented towards the promotion of green energy, does not propose as the first choice the solution that allows the most CO_2 to be avoided. In fact, the first solution proposed by the software avoids 6185 tons/year of greenhouse gases as opposed to 6440 tons/year for the solution found previously, which is a difference of 255 tons/year which constitutes no less than 5100 tons for the life of the project, which is a gigantic figure. To push the study even further and to shed light on this highly rated software, the next step will be the calculation of the cost price of a ton of CO_2 avoided, this calculation will be made in Table 4 below.

Table 4: Calculation of the cost price of a ton of CO_2 avoided.

	Investment in USD (A)	The potential financial gain in USD (B)	(A) – (B) in USD	Amount of CO_2 avoided over the life of the project in tons	The cost price of one ton of CO_2 avoided in USD
P1	6 788 695	10 272 938	-3 484 243	123 708.2	-28.16
P2	6 860 560	10 342 459	-3 481 899	125 017.5	-27.85
P3	7 427 400	11 056 980	-3 629 580	126 331.6	-28.73
P4	7 573 406	11 261 474	-3 688 068	128 807.4	-28.63
P5	0	0	0	0	0
P6	72677	0	72677	0	0
P7	796 338	0	796 338	31 536.2	25.25
P8	1 790 336	0	1 790 336	38 556.4	46.43

We note that this qualitative study reinforces the quantitative study already conducted. Indeed, this ecological-economic study does not give an advantage to the best solution proposed by the software but, on the contrary, puts the first four solutions on an equal footing, with even a slight advantage for the last three. Indeed, as the previous table shows, the price to avoid one ton of CO_2 is higher for the first software proposal. It can be said then that to carry out a rigorous ecological study, a post-HOMER study is necessary to obtain results that are more beneficial to the environment (Figure 9).

© Copyright iMedPub

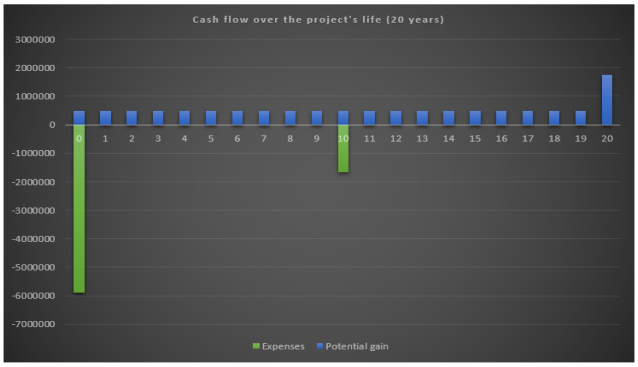


Figure 9: Cash flow of the chosen solution.

Conclusion

During this study, it was shown that a significant amount of greenhouse gases can be avoided if the choice of the hybrid system used is appropriate. This choice, as we have seen, is not automatically delivered by the HOMER software, Indeed, it has been demonstrated that this well-known software does not allow to obtain the best results ecologically speaking and a posterior study is mandatory. This said and although this work is undoubtedly important it remains only a fraction of the submerged part of the iceberg, and without a real will to change, nothing would be possible, thus and for the good of the planet, a global energy plan should be put in place as soon as possible, and this will also involve the design of more environmentally friendly software or the improvement of existing software, these efforts on the part of scientists around the world will undoubtedly help to achieve a more rapid change. To be indifferent to the current climatic situation is in fact to neglect the future of the generations to come, these last ones will find themselves despite them being in a very critical situation.

Although this solution is not the best economically, its financial aspect is not to be neglected, since the cash flow remains very interesting, as shown in figure 10 below. Indeed, by favoring the solution that avoids the most CO_2, the project can generate a profit of 3 688 068 USD over 20 years, which is a very important sum. So we notice that we can help the planet and at the same time make important financial gains. These sums put at stake can be a source of motivation for potential investors.

References

1. Moreno Rocha CM, Milanes Batista C, Arguello Rodríguez WF, Fontalvo Ballesteros AJ, Núñez Álvarez JR, et al. (2022) Challenges and perspectives of the use of photovoltaic solar energy in Colombia. Int J Electr Comput Eng 12:4521-4528
2. Hussain AN, Ali AJ, Ahmed FS (2020) Power quality improvement based on hybrid coordinated design of renewable energy sources for DC link channel DSTATCOM. Int J Electr Comput Eng 10:5108-5122
3. Alamsyah MS, Ikhlayel M, Setijadi E (2020) Internet of things–based vital sign monitoring system. Int J Electr Comput Eng 10:5891-5898
4. Baniyounes AM, Ghadi YY, Baker AA (2019) Institutional smart buildings energy audit. Int J Electr Comput Eng 9:783-788
5. Wang QJ, Feng GF, Wang HJ, Chang CP (2022) The influence of political ideology on greenhouse gas emissions. Glob Environ Change 74:102496
6. Reina G, Mauledoux M, Avilés OA (2021) Simulation of a microgrid for a non-interconnected zone that integrates renewable energies. Int J Electr Comput Eng 11:201-216
7. Utomo SB, Setiawan I, Fajar B, Winoto SH, Marwanto A (2022) Optimizing of the installed capacity of hybrid renewable energy with a modified MPPT model. Int J Electr Comput Eng 12:73-81
8. Khormandichali SMM, Kamarposhti MA (2019) Optimal placement of wind generation units in order to increase revenues and reduce the imposed costs in the distribution system considering uncertainty. Int J Electr Comput Eng 9:4524-4539
9. Kabulov A, Saymanov I (2021) Application of IoT technology in ecology (on the example of the Aral Sea region). In 2021 International Conference on Information Science and Communications Technologies (ICISCT) (pp. 1-5). IEEE.